


LIGHTWEIGHT FABRICS


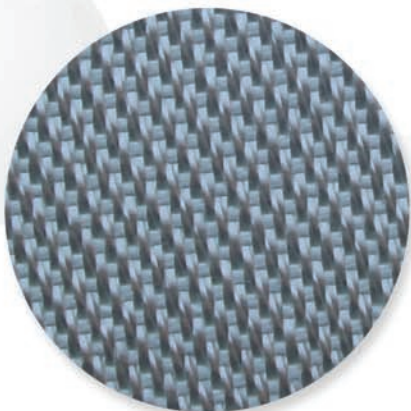


Electrical Insulation/Reinforcements	
Styles	Weights
1080	1.45 ounce
2113	2.31 ounce
2116	3.22 ounce
2165	120 g/m ²
7628	6.00 ounce
7630	6.00 ounce
7637	230 g/m ²
7642	6.85 ounce
7581	9.00 ounce
7781	9.00 ounce

SILICA FABRIC


High Temperature fabrics rated up to 2300°F.
Commercial and Aerospace grades.

- ✓ Asbestos Free
- ✓ Chemical Compatible
- ✓ Low Thermal Conductivity
- ✓ Fire Proof
- ✓ Low Smoke Emission
- ✓ Resists Oxidation
- ✓ Available in different weights and thicknesses
- ✓ Preshrunk and non-preshrunk

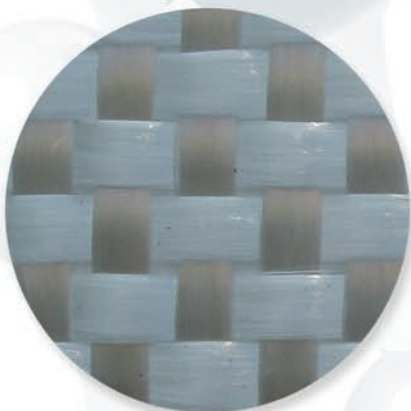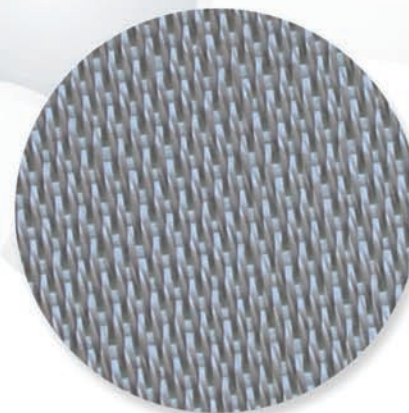

E-GLASS WOVEN ROVING

Weave Style - plain	
Style	Weights
EWR 200	6 ounce
EWR 400	12 ounce
EWR 500	15 ounce
EWR 600	18 ounce
EWR 800	24 ounce



thechemicalcompany

Global Bonds in Chemistry

CHOPPED STRAND MAT

Style	Weights
CSM 150	0.5 ounce
CSM 225	0.75 ounce
CSM 300	1.0 ounce
CSM 450	1.5 ounce
CSM 600	2.0 ounce



WOVEN COMBINATION MAT

Style	Woven Roving Weights	Chopping Layer Weights	Total Weights
WRM 300/300	9 ounce	1.0 ounce	10 ounce
WRM 500/450	15 ounce	1.5 ounce	16.5 ounce
WRM 600/300	18 ounce	1.0 ounce	19 ounce
WRM 800/450	24 ounce	1.5 ounce	25.5 ounce
WRM 1200/300	36 ounce	1.0 ounce	37 ounce



REINFORCED MESH

Weaving – Leno		
Style	Mesh Size (mm)	Tensile strength Warp x Weft
M60 - 2 x 2	2 x 2	550 x 450
M70 - 5 x 5	5 x 5	750 x 700
M80 - 4 x 4	4 x 4	750 x 800
M115 - 4 x 5	4 x 5	950 x 1250
M145 - 4 x 5	4 x 5	1300 x 1400

